

## Assembly

1, Remove the four screws from location 'A' in the lid of the lamp. Connect the lid to bracket using the three bolts provided, ensuring the cable locates through the centre of the lid.

2, Connect the cable to the terminal block inside the main lamp frame. Make sure the brown connects to brown, blue to blue and yellow & green to yellow and green.

**REMEMBER ELECTRIC CAN KILL. CONSULT A QUALIFIED ELECTRICIAN.**


3, Once the connections are made screw the lid back to the frame. Place the acrylic disc into position using the three brass round nuts.

### Changing the lamp (bulb)

Undo the three bolts in the stainless steel plate (marked 'B' on fig 1). The acrylic tube and lauvre assembly will drop and rest on the large acrylic disc allowing you to use both hands for the rest of the operation. Once changed slide back up an replace the bolts.

### Fitting Saturn lamp and bracket to Post.

Lie the post down and make your connection as in section 2. Once the terminal is connected put the bracket over the locating collar of the post and tighten grub screws. Once all connections have been made stand post up and bolt down.

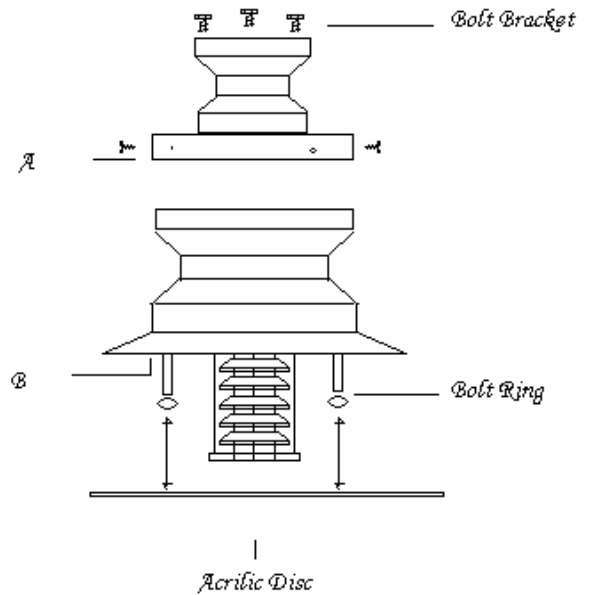

### LT12 Saturn Lantern

